Jotun – fra Rosenberg til full produksjon



Havtil, Konstruksjonsdagen 01.09.2026

Trond Morten Thomassen, Operations
Portfolio Engineering Manager, Vår Energi

Agenda

- Litt om selskapet
- Jotun FPSO oppgradering og levetidsforlengelse
- Noen erfaringer relevant for konstruksjonsdagen
- Erfaringer fra oppstart
- Områdeutvikling og “full” produksjon



vår energi

A leading pure play E&P

3rd largest oil and gas producer in Norway

- **High quality portfolio**
- **Diversified asset base**
- **Balanced commodity mix**

Interests in


~50%

of all fields[1]

Liquid share[2]

~65%



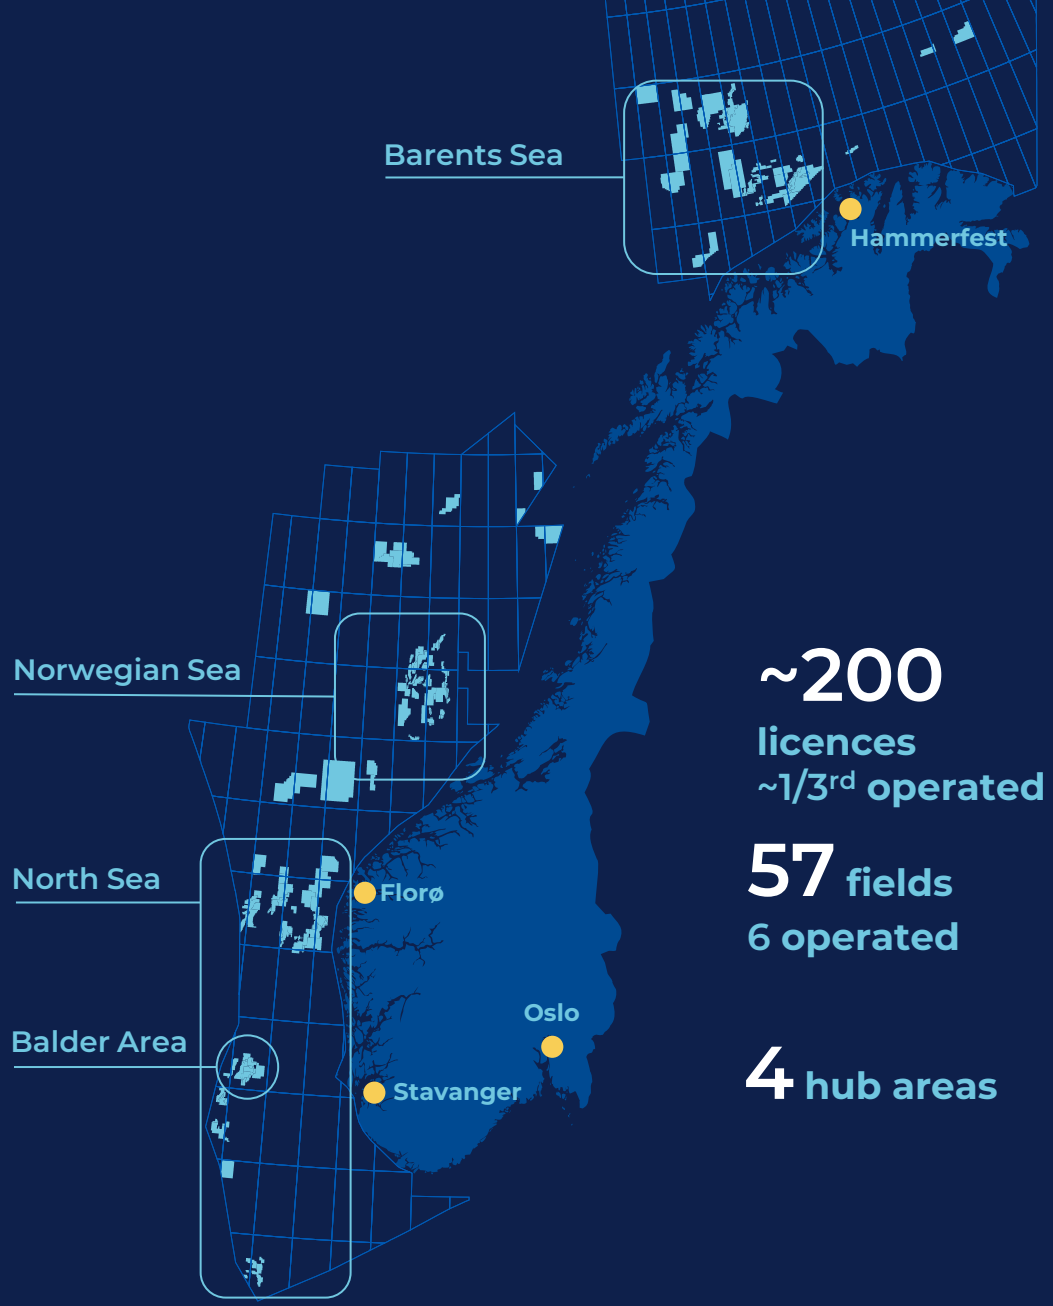

~200
licences
~1/3rd operated

57 fields
6 operated

4 hub areas

■ Vår Energi licences
● Office locations

1. All producing assets on the NCS
2. Based on 2P reserves per end-2025


vår energi

Transformational growth delivered



Photo: Jotun FPSO

Production
kboepd, net

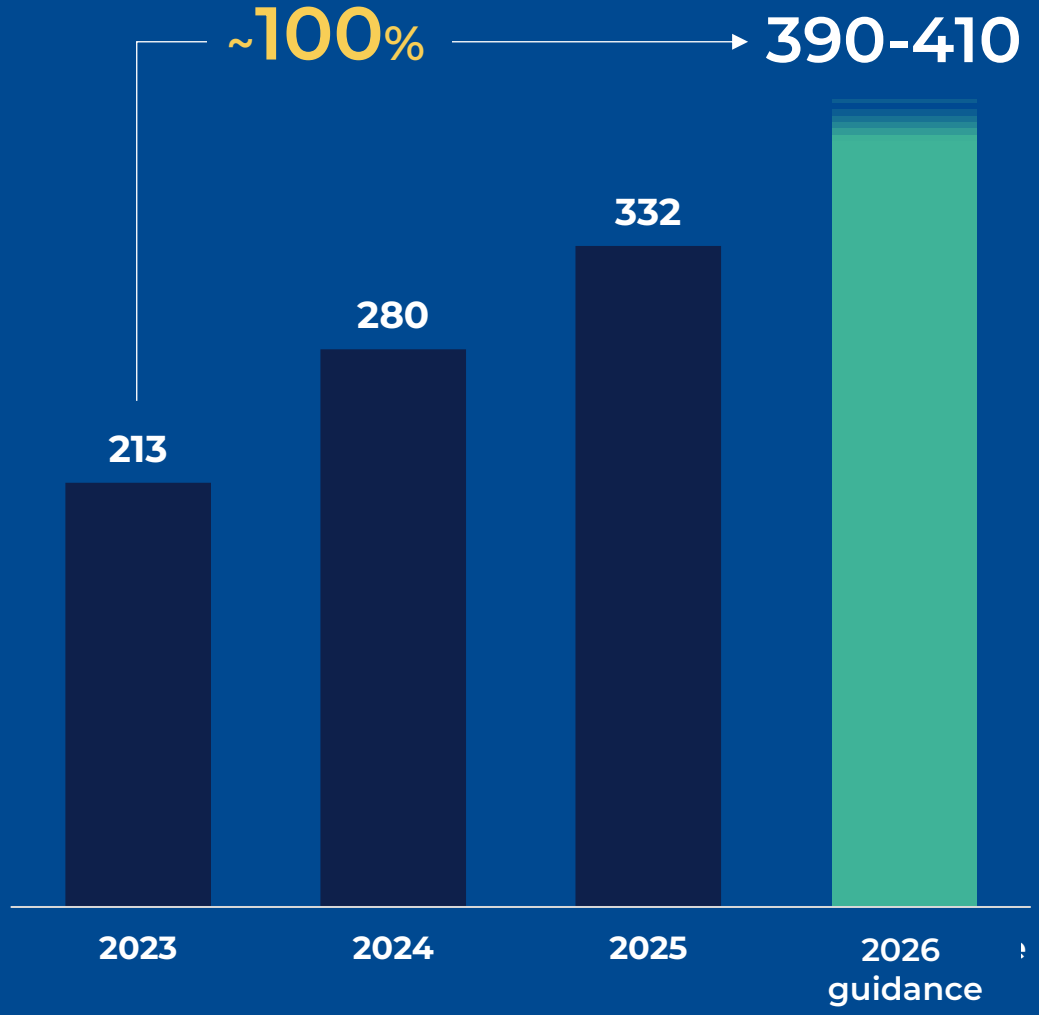


vår energi

Jotun FPSO

Opprinnelig ferdigstilt
(Kværner Rosenberg):

Mai 1998 – Juni 1999

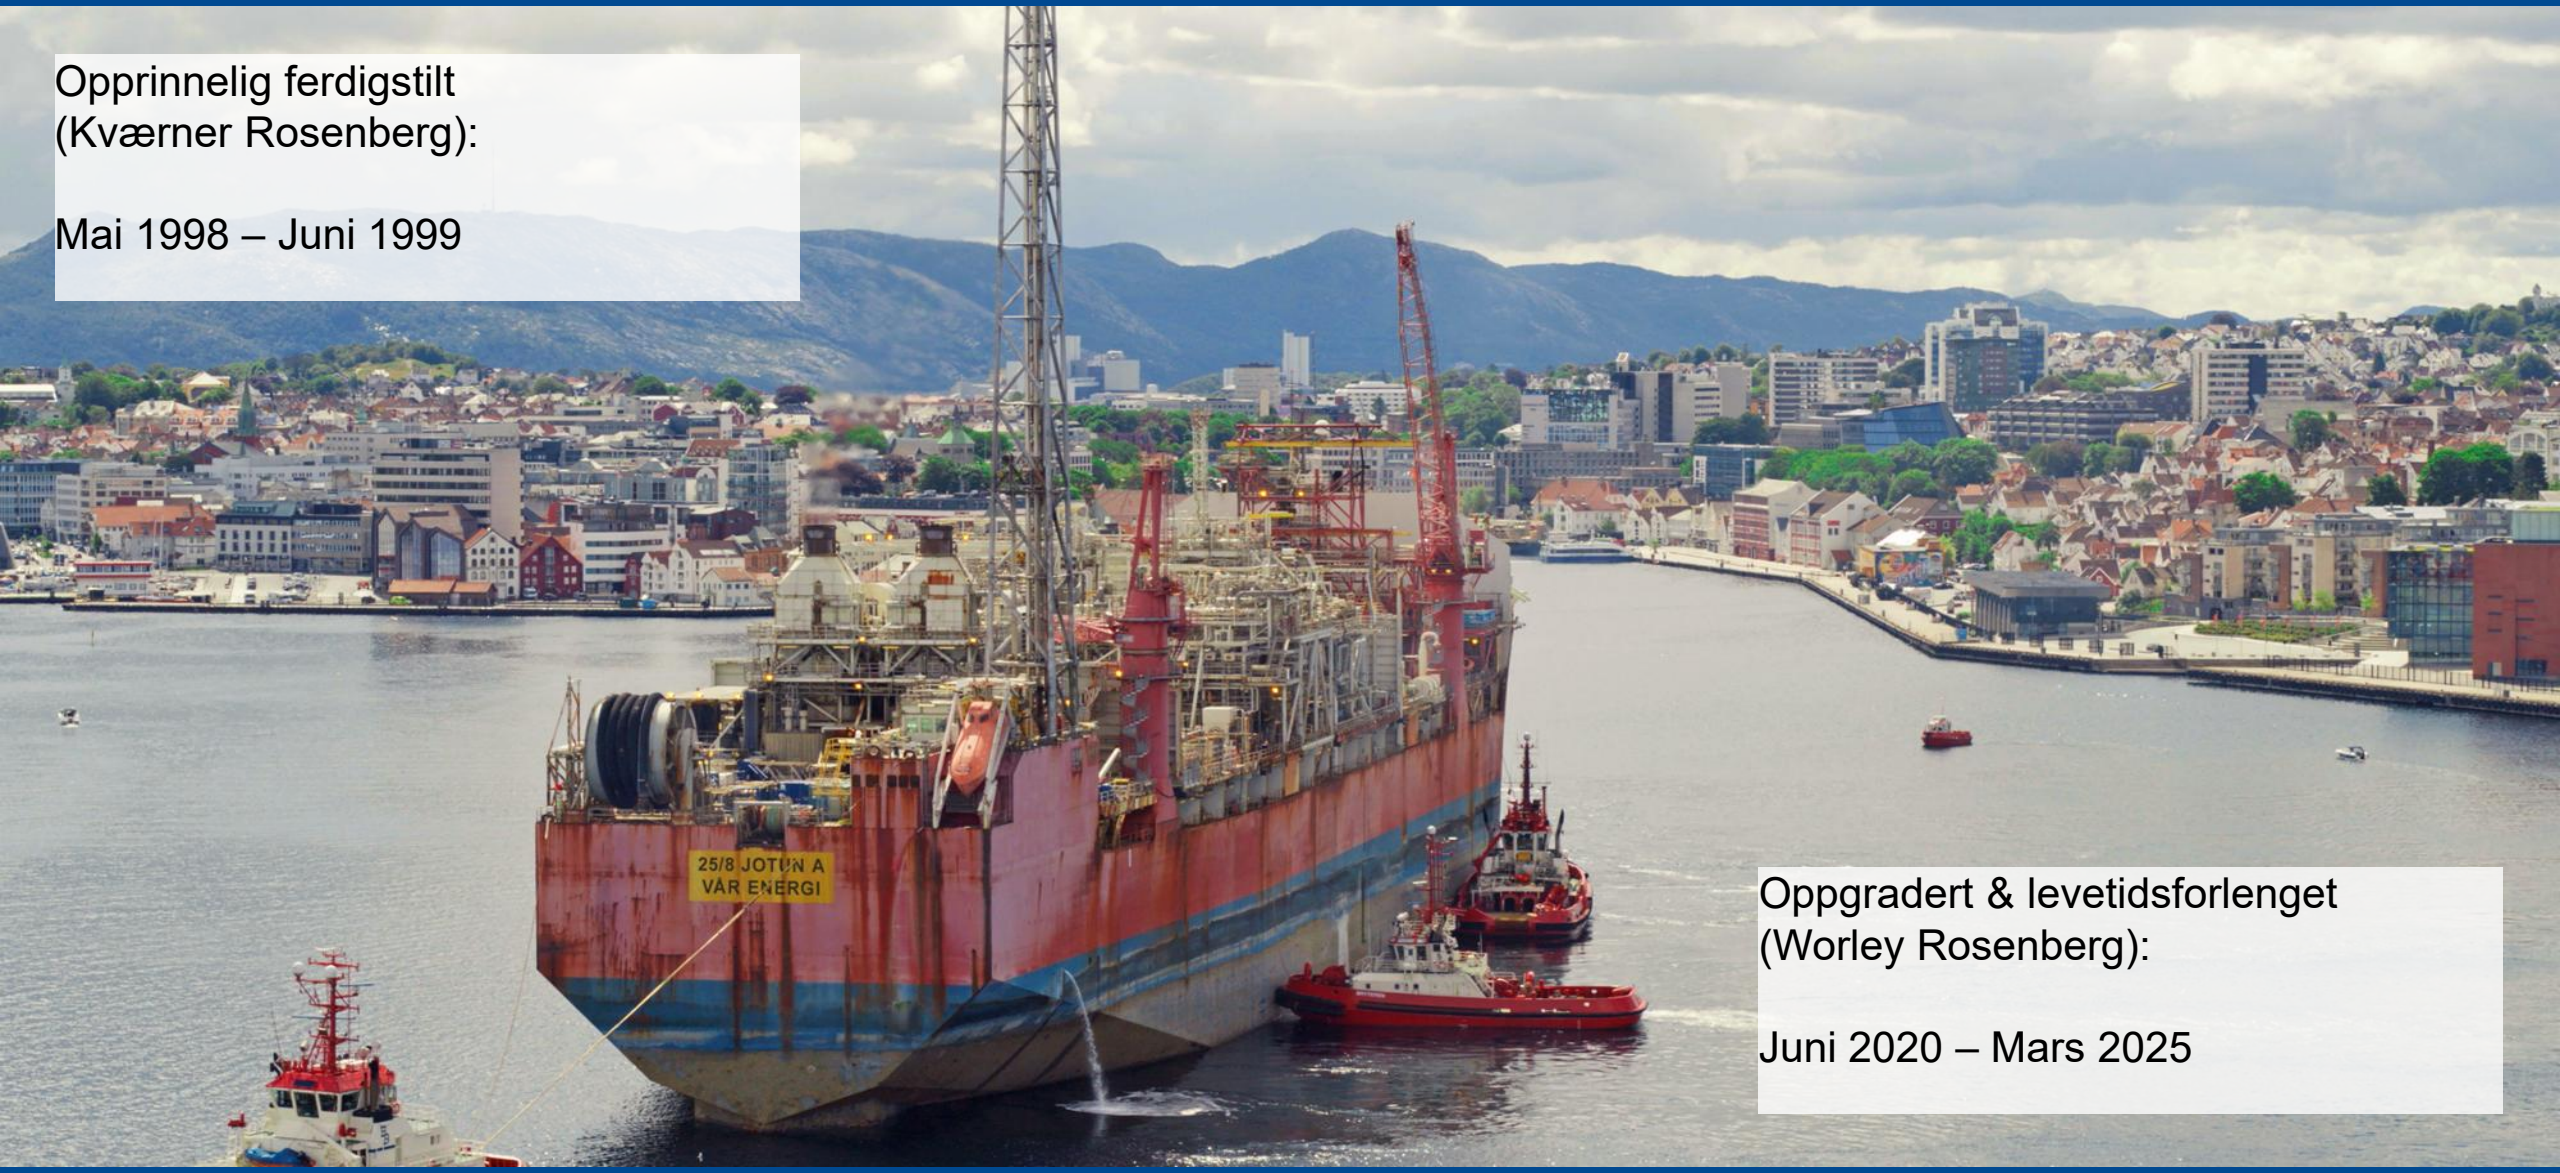

Oppgradert & levetidsforlenget
(Worley Rosenberg):


Juni 2020 – Mars 2025

vår energi

Material/Material Selection/Surface

- Stainless steel (316ss, duplex SS and 6Mo) / GRP
  - Generally good
  - No chloride stress corrosion cracks found
- Carbon steel
  - Corrosion on steel structures and piping , but few below retirement WT
  - External hot dip galvanized pipe close to totally consumed
- Rubber lined pipes
  - Good condition, only a few touch ups in flange sealing area required
- Surface & preservation
  - Large scope requiring inspection & execution planning
- PFP
  - Good condition, but repairs and modifications required



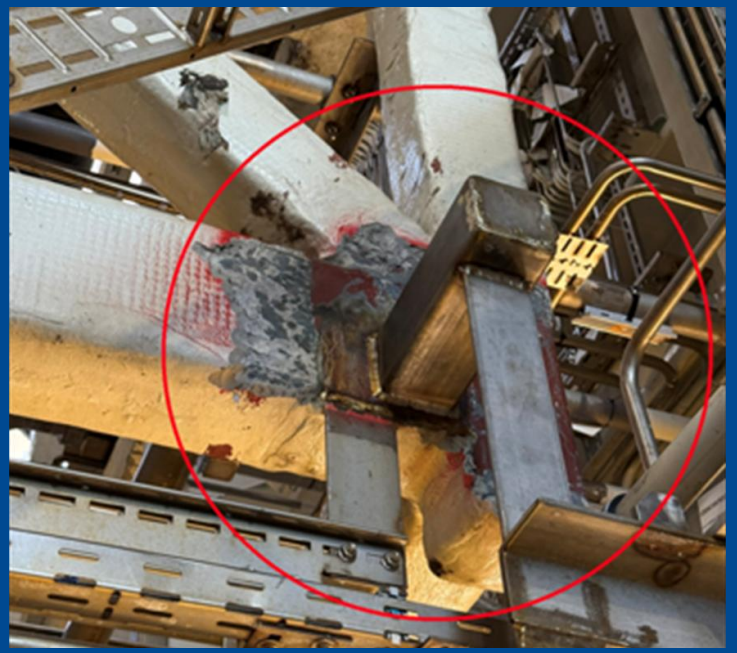

vår energi

Ballast Tanks



- **Inspection findings:**
  - Some corrosion
  - Anode consumption lower than expected
  - Anodes not submerged or connected
  - Original fabrication defects
- **Life Extension:**
  - Surfaces blasted and coated
  - Defects corrected
  - Improved fatigue



vår energi

Cargo Tanks & Hull

Cargo tanks - inspection

- Surface condition generally good

Life Extension:

- 5-10% coating repairs performed
- Anodes on bottom only slightly consumed (replaced)

Hull – inspection

- Surface condition very good towards sea (submerged)

Life Extension:

- Only new top coat applied
- Cathodic suppression system replaced



Jotun Hull post cleaning

vår energi

Erfaringer fra oppstart

Tilnærmet problemfri anleggsoppstart 2025

- Oppstart: 22/6 - 2025
- Platåproduksjon nådd (80 kbd): September 2025

Det er alltid noen utfordringer å jobbe med:

- Alarmfrekvens
- Stabilitet på noen mekaniske pakker
- Nytt & gammelt (prosedyrer & reservedeler)

Områdeutvikling & “full produksjon”





Jotun FPSO er sentral i Balder området (HUB)

- Balder Next krever mer prosesskapasitet
- Høy-aktivites-periode (HAP) allerede sommeren 2026

vår energi


25/11 JOTUN FPS
VÅR ENERGI
JOTUN


vår energi